

Boise-Cascade Reduces Excessive Process Variability with High Signal Magmeter Technology

RESULTS

- Reduced variability by 85% of original output
- Improved process control
- Improved paper quality

APPLICATION

Pressure screen rejects flow

CUSTOMER

Boise-Cascade De Ridder, LA

CHALLENGE

Boise-Cascade was experiencing variability in paper quality due to erratic pressure screen reject flows. In an attempt to reduce this variability, they minimized analog damping of the existing flowmeter. Due to instability in this measurement, they did not achieve the desired results. Based on these issues, the mill decided to test new magnetic flowmeters from multiple suppliers that would provide stable measurement with minimal damping. The results of this test would determine the plant standard for magmeter applications.

SOLUTION

After discussions with many different manufacturers, the mill chose two meters to test in the pressure screen reject flow application - a Dual-Frequency magnetic flowmeter from one manufacturer, and the Rosemount 8712/8707 High Signal Magnetic Flowmeter System.

To meet the desired result of improved process control, all magmeters in this application were set with their lowest analogue damping. The results from testing showed the Rosemount 8712/8707 High Signal Magnetic Flowmeter outperformed the Dual-Frequency magmeter supplied by the other manufacturer, reducing the variability by 85% when compared to the original measurement.



The High Signal Magmeter reduced process variability by 85%.



Rosemount 8712 High Signal™ with easy-to-use Local Operator Interface (LOI).

ROSEMOUNT®

For more information:
www.rosemount.com


EMERSON™
 Process Management

The High Signal technology generates a magnetic field ten-times stronger than the Dual-Frequency meter from the other manufacturer, which proved to be a key difference in this difficult application. This stronger field delivered the results that Boise-Cascade needed to stabilize the flow measurement with minimal damping, allowing Boise-Cascade to improve process control and ultimately paper quality.



FIGURE 1. Past Magmeter Performance.

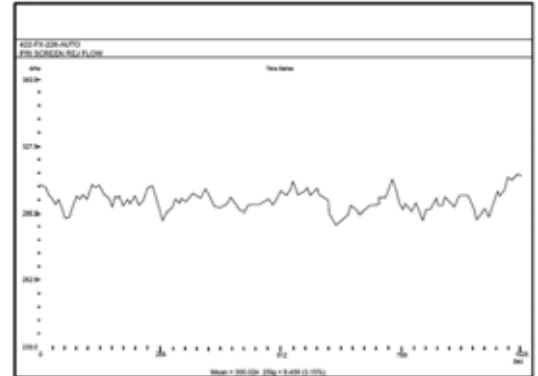


FIGURE 2. Competitor's Magmeter Performance.

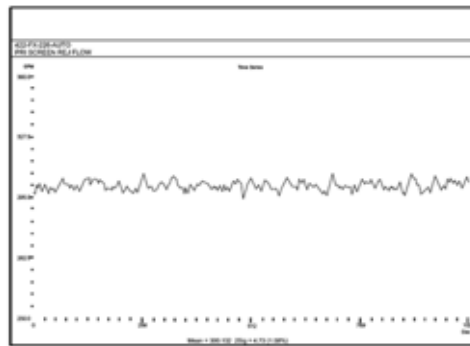


FIGURE 3. Rosemount High-Signal Magmeter System Performance.

Showing less variation than its leading competitors.

RESOURCES

<http://www.emersonprocess.com/rosemount/document/pds/8700.pdf>

The Emerson logo is a trade mark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

Emerson Process Management
 Rosemount Division
 8200 Market Boulevard
 Chanhassen, MN 55317 USA
 T (U.S.) 1-800-999-9307
 T (International) (952) 906-8888
 F (952) 949-7001
www.rosemount.com

Emerson Process Management
 Wiltonstraat 30
 3905 KW Veenendaal
 The Netherlands
 T 31 (0) 318 495 555
 F 31 (0) 318 495 556

Emerson Process Management
 Emerson Process Management Asia Pacific
 Private Limited
 1 Pandan Crescent
 Singapore 128461
 T (65) 6777 8211
 F (65) 6777 0947
Enquiries@AP.EmersonProcess.com



For more information:
www.rosemount.com

